


ECO 1 P6

Wick developed for container and pillar candles made of paraffin wax, natural oil/fats and blends ¹⁾

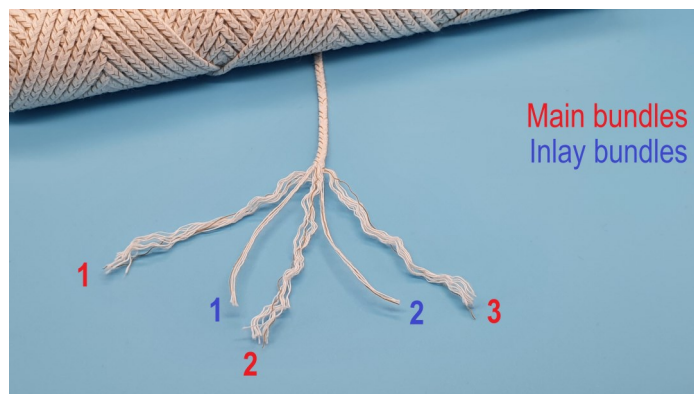

Example photo of this type of wick

Technical details

Wick material:	100 % pure cotton + paper threads
Chemical treatment:	P6
Wick construction:	Flatwick type + additional inlay bundles
Number of threads:	27 = 22 single threads + 5 paper threads
Braid density:	480 braids per meter of wick (= wick tightness)
Yield:	Approx. 1040 m/kg

1) Although originally developed for the specific purpose mentioned here, Wedo wicks often solve burning problems in a number of different applications. Please contact us if you have questions regarding specific applications.

Wedo is certified according to EN ISO 9001:2015. Product conforms to REACH (EG) 1907/2006 and RAL GZ-041

This information is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including any existing third party patent rights. In particular, no guarantee of properties in the legal sense is implied. The technical specifications can vary slightly due to normal tolerances in materials and manufacturing. We reserve the right to make any changes according to technological progress or further developments. The customer is not exempted from the obligation to conduct careful inspection and testing of incoming goods. Reference to trade names used by other companies is neither a recommendation, nor is it intended to suggest that similar products could not be used. All our business transactions shall be governed exclusively by our General Sales Conditions.


Westdeutsche Dochtfabrik GmbH & Co. KG - Ravensstrasse 46 - 41334 Nettetal - Germany - Phone +49 2157 12060

info@wedobraids.com

www.wedobraids.com

ECO 1,5 P6

Wick developed for container and pillar candles made of paraffin wax, natural oil/fats and blends ¹⁾

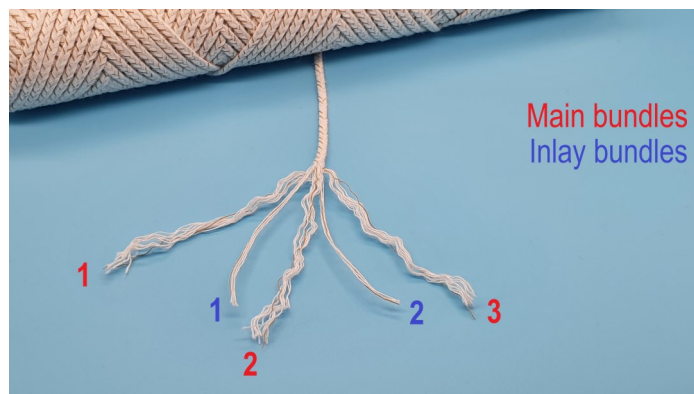

Example photo of this type of wick

Technical details

Wick material:	100 % pure cotton + paper threads
Chemical treatment:	P6
Wick construction:	Flatwick type + additional inlay bundles
Number of threads:	30 = 25 single threads + 5 paper threads
Braid density:	450 braids per meter of wick (= wick tightness)
Yield:	Approx. 930 m/kg

1) Although originally developed for the specific purpose mentioned here, Wedo wicks often solve burning problems in a number of different applications. Please contact us if you have questions regarding specific applications.

Wedo is certified according to EN ISO 9001:2015. Product conforms to REACH (EG) 1907/2006 and RAL GZ-041

This information is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including any existing third party patent rights. In particular, no guarantee of properties in the legal sense is implied. The technical specifications can vary slightly due to normal tolerances in materials and manufacturing. We reserve the right to make any changes according to technological progress or further developments. The customer is not exempted from the obligation to conduct careful inspection and testing of incoming goods. Reference to trade names used by other companies is neither a recommendation, nor is it intended to suggest that similar products could not be used. All our business transactions shall be governed exclusively by our General Sales Conditions.


Westdeutsche Dochtfabrik GmbH & Co. KG - Ravensstrasse 46 - 41334 Nettetal - Germany - Phone +49 2157 12060

info@wedobraids.com

www.wedobraids.com

ECO 2 P6

Wick developed for container and pillar candles made of paraffin wax, natural oil/fats and blends ¹⁾

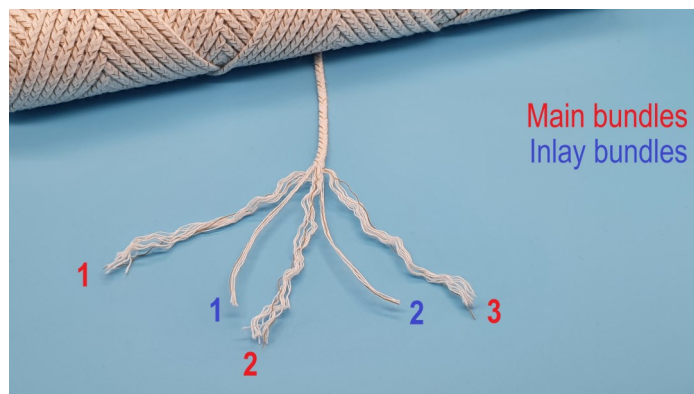

Example photo of this type of wick

Technical details

Wick material:	100 % pure cotton + paper threads
Chemical treatment:	P6
Wick construction:	Flatwick type + additional inlay bundles
Number of threads:	35 = 30 single threads + 5 paper threads
Braid density:	450 braids per meter of wick (= wick tightness)
Yield:	Approx. 820 m/kg

1) Although originally developed for the specific purpose mentioned here, Wedo wicks often solve burning problems in a number of different applications. Please contact us if you have questions regarding specific applications.

Wedo is certified according to EN ISO 9001:2015. Product conforms to REACH (EG) 1907/2006 and RAL GZ-041

This information is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including any existing third party patent rights. In particular, no guarantee of properties in the legal sense is implied. The technical specifications can vary slightly due to normal tolerances in materials and manufacturing. We reserve the right to make any changes according to technological progress or further developments. The customer is not exempted from the obligation to conduct careful inspection and testing of incoming goods. Reference to trade names used by other companies is neither a recommendation, nor is it intended to suggest that similar products could not be used. All our business transactions shall be governed exclusively by our General Sales Conditions.


Westdeutsche Dochtfabrik GmbH & Co. KG - Ravensstrasse 46 - 41334 Nettetal - Germany - Phone +49 2157 12060

info@wedobraids.com

www.wedobraids.com

ECO 4 P6

Wick developed for container and pillar candles made of paraffin wax, natural oil/fats and blends ¹⁾

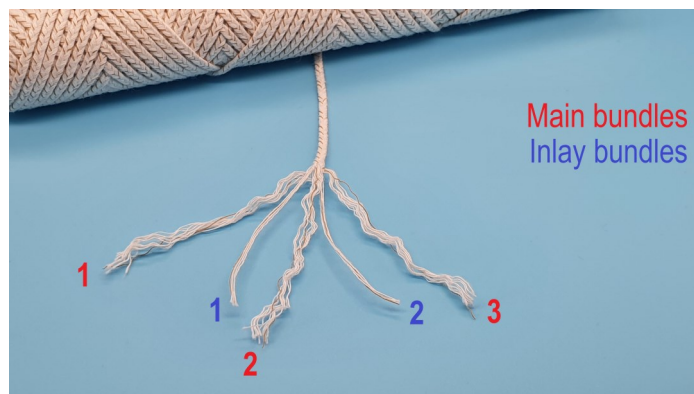

Example photo of this type of wick

Technical details

Wick material:	100 % pure cotton + paper threads
Chemical treatment:	P6
Wick construction:	Flatwick type + additional inlay bundles
Number of threads:	37 = 32 single threads + 5 paper threads
Braid density:	460 braids per meter of wick (= wick tightness)
Yield:	Approx. 750 m/kg

1) Although originally developed for the specific purpose mentioned here, Wedo wicks often solve burning problems in a number of different applications. Please contact us if you have questions regarding specific applications.

Wedo is certified according to EN ISO 9001:2015. Product conforms to REACH (EG) 1907/2006 and RAL GZ-041

This information is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including any existing third party patent rights. In particular, no guarantee of properties in the legal sense is implied. The technical specifications can vary slightly due to normal tolerances in materials and manufacturing. We reserve the right to make any changes according to technological progress or further developments. The customer is not exempted from the obligation to conduct careful inspection and testing of incoming goods. Reference to trade names used by other companies is neither a recommendation, nor is it intended to suggest that similar products could not be used. All our business transactions shall be governed exclusively by our General Sales Conditions.


Westdeutsche Dochtfabrik GmbH & Co. KG - Ravensstrasse 46 - 41334 Nettetal - Germany - Phone +49 2157 12060

info@wedobraids.com

www.wedobraids.com

ECO 6 P6

Wick developed for container and pillar candles made of paraffin wax, natural oil/fats and blends ¹⁾

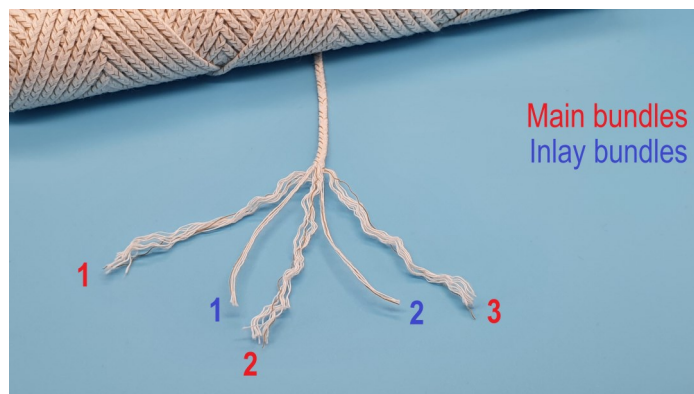

Example photo of this type of wick

Technical details

Wick material:	100 % pure cotton + paper threads
Chemical treatment:	P6
Wick construction:	Flatwick type + additional inlay bundles
Number of threads:	43 = 38 single threads + 5 paper threads
Braid density:	400 braids per meter of wick (= wick tightness)
Yield:	Approx. 660 m/kg

1) Although originally developed for the specific purpose mentioned here, Wedo wicks often solve burning problems in a number of different applications. Please contact us if you have questions regarding specific applications.

Wedo is certified according to EN ISO 9001:2015. Product conforms to REACH (EG) 1907/2006 and RAL GZ-041

This information is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including any existing third party patent rights. In particular, no guarantee of properties in the legal sense is implied. The technical specifications can vary slightly due to normal tolerances in materials and manufacturing. We reserve the right to make any changes according to technological progress or further developments. The customer is not exempted from the obligation to conduct careful inspection and testing of incoming goods. Reference to trade names used by other companies is neither a recommendation, nor is it intended to suggest that similar products could not be used. All our business transactions shall be governed exclusively by our General Sales Conditions.


Westdeutsche Dochtfabrik GmbH & Co. KG - Ravensstrasse 46 - 41334 Nettetal - Germany - Phone +49 2157 12060

info@wedobraids.com

www.wedobraids.com

ECO 8 P6

Wick developed for container and pillar candles made of paraffin wax, natural oil/fats and blends ¹⁾

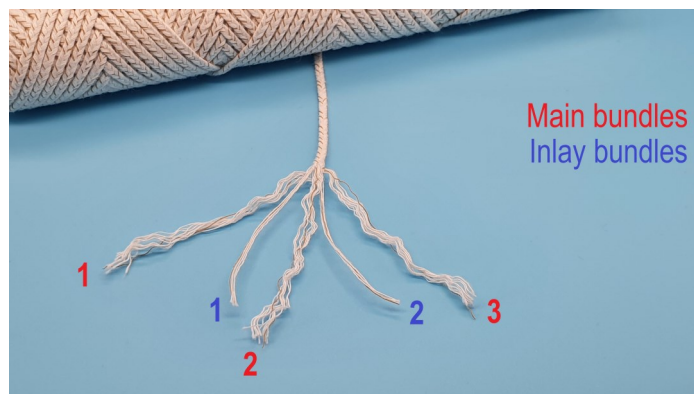

Example photo of this type of wick

Technical details

Wick material:	100 % pure cotton + paper threads
Chemical treatment:	P6
Wick construction:	Flatwick type + additional inlay bundles
Number of threads:	49 = 44 single threads + 5 paper threads
Braid density:	380 braids per meter of wick (= wick tightness)
Yield:	Approx. 590 m/kg

1) Although originally developed for the specific purpose mentioned here, Wedo wicks often solve burning problems in a number of different applications. Please contact us if you have questions regarding specific applications.

Wedo is certified according to EN ISO 9001:2015. Product conforms to REACH (EG) 1907/2006 and RAL GZ-041

This information is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including any existing third party patent rights. In particular, no guarantee of properties in the legal sense is implied. The technical specifications can vary slightly due to normal tolerances in materials and manufacturing. We reserve the right to make any changes according to technological progress or further developments. The customer is not exempted from the obligation to conduct careful inspection and testing of incoming goods. Reference to trade names used by other companies is neither a recommendation, nor is it intended to suggest that similar products could not be used. All our business transactions shall be governed exclusively by our General Sales Conditions.


Westdeutsche Dochtfabrik GmbH & Co. KG - Ravensstrasse 46 - 41334 Nettetal - Germany - Phone +49 2157 12060

info@wedobraids.com

www.wedobraids.com

ECO 10 P6

Wick developed for container and pillar candles made of paraffin wax, natural oil/fats and blends ¹⁾

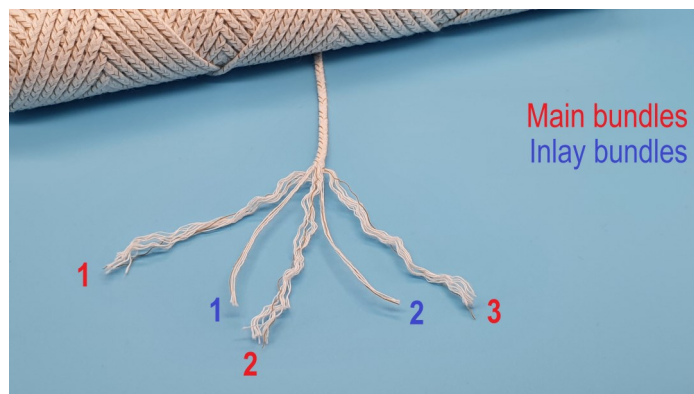

Example photo of this type of wick

Technical details

Wick material:	100 % pure cotton + paper threads
Chemical treatment:	P6
Wick construction:	Flatwick type + additional inlay bundles
Number of threads:	55 = 50 single threads + 5 paper threads
Braid density:	220 braids per meter of wick (= wick tightness)
Yield:	Approx. 580 m/kg

1) Although originally developed for the specific purpose mentioned here, Wedo wicks often solve burning problems in a number of different applications. Please contact us if you have questions regarding specific applications.

Wedo is certified according to EN ISO 9001:2015. Product conforms to REACH (EG) 1907/2006 and RAL GZ-041

This information is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including any existing third party patent rights. In particular, no guarantee of properties in the legal sense is implied. The technical specifications can vary slightly due to normal tolerances in materials and manufacturing. We reserve the right to make any changes according to technological progress or further developments. The customer is not exempted from the obligation to conduct careful inspection and testing of incoming goods. Reference to trade names used by other companies is neither a recommendation, nor is it intended to suggest that similar products could not be used. All our business transactions shall be governed exclusively by our General Sales Conditions.


Westdeutsche Dochtfabrik GmbH & Co. KG - Ravensstrasse 46 - 41334 Nettetal - Germany - Phone +49 2157 12060

info@wedobraids.com

www.wedobraids.com

ECO 12 P6

Wick developed for container and pillar candles made of paraffin wax, natural oil/fats and blends ¹⁾

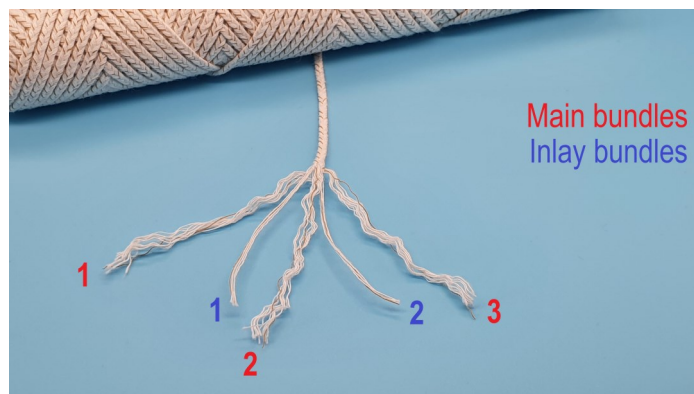

Example photo of this type of wick

Technical details

Wick material:	100 % pure cotton + paper threads
Chemical treatment:	P6
Wick construction:	Flatwick type + additional inlay bundles
Number of threads:	60 = 55 single threads + 5 paper threads
Braid density:	220 braids per meter of wick (= wick tightness)
Yield:	Approx. 530 m/kg

1) Although originally developed for the specific purpose mentioned here, Wedo wicks often solve burning problems in a number of different applications. Please contact us if you have questions regarding specific applications.

Wedo is certified according to EN ISO 9001:2015. Product conforms to REACH (EG) 1907/2006 and RAL GZ-041

This information is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including any existing third party patent rights. In particular, no guarantee of properties in the legal sense is implied. The technical specifications can vary slightly due to normal tolerances in materials and manufacturing. We reserve the right to make any changes according to technological progress or further developments. The customer is not exempted from the obligation to conduct careful inspection and testing of incoming goods. Reference to trade names used by other companies is neither a recommendation, nor is it intended to suggest that similar products could not be used. All our business transactions shall be governed exclusively by our General Sales Conditions.


Westdeutsche Dochtfabrik GmbH & Co. KG - Ravensstrasse 46 - 41334 Nettetal - Germany - Phone +49 2157 12060

info@wedobraids.com

www.wedobraids.com

ECO 14 P6

Wick developed for container and pillar candles made of paraffin wax, natural oil/fats and blends ¹⁾

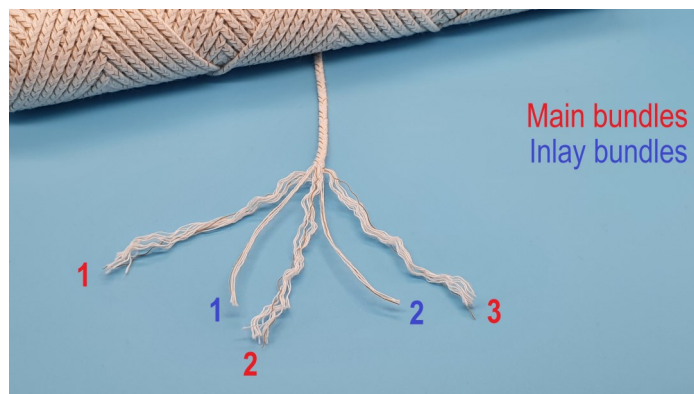

Example photo of this type of wick

Technical details

Wick material:	100 % pure cotton + paper threads
Chemical treatment:	P6
Wick construction:	Flatwick type + additional inlay bundles
Number of threads:	69 = 64 single threads + 5 paper threads
Braid density:	200 braids per meter of wick (= wick tightness)
Yield:	Approx. 460 m/kg

1) Although originally developed for the specific purpose mentioned here, Wedo wicks often solve burning problems in a number of different applications. Please contact us if you have questions regarding specific applications.

Wedo is certified according to EN ISO 9001:2015. Product conforms to REACH (EG) 1907/2006 and RAL GZ-041

This information is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including any existing third party patent rights. In particular, no guarantee of properties in the legal sense is implied. The technical specifications can vary slightly due to normal tolerances in materials and manufacturing. We reserve the right to make any changes according to technological progress or further developments. The customer is not exempted from the obligation to conduct careful inspection and testing of incoming goods. Reference to trade names used by other companies is neither a recommendation, nor is it intended to suggest that similar products could not be used. All our business transactions shall be governed exclusively by our General Sales Conditions.


Westdeutsche Dochtfabrik GmbH & Co. KG - Ravensstrasse 46 - 41334 Nettetal - Germany - Phone +49 2157 12060

info@wedobraids.com

www.wedobraids.com

ECO 16 P6

Wick developed for container and pillar candles made of paraffin wax, natural oil/fats and blends ¹⁾

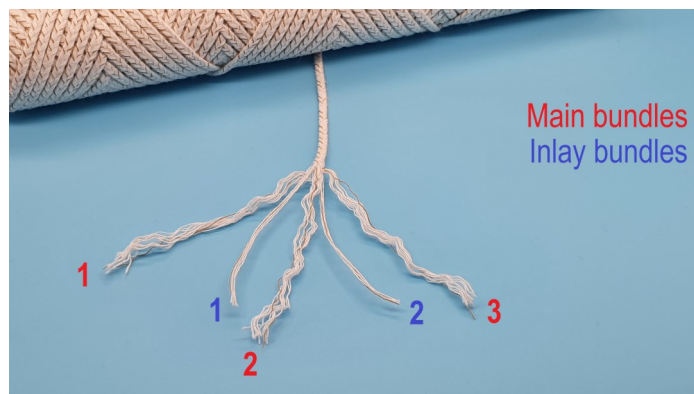

Example photo of this type of wick

Technical details

Wick material:	100 % pure cotton + paper threads
Chemical treatment:	P6
Wick construction:	Flatwick type + additional inlay bundles
Number of threads:	77 = 72 single threads + 5 paper threads
Braid density:	200 braids per meter of wick (= wick tightness)
Yield:	Approx. 400 m/kg

1) Although originally developed for the specific purpose mentioned here, Wedo wicks often solve burning problems in a number of different applications. Please contact us if you have questions regarding specific applications.

Wedo is certified according to EN ISO 9001:2015. Product conforms to REACH (EG) 1907/2006 and RAL GZ-041

This information is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including any existing third party patent rights. In particular, no guarantee of properties in the legal sense is implied. The technical specifications can vary slightly due to normal tolerances in materials and manufacturing. We reserve the right to make any changes according to technological progress or further developments. The customer is not exempted from the obligation to conduct careful inspection and testing of incoming goods. Reference to trade names used by other companies is neither a recommendation, nor is it intended to suggest that similar products could not be used. All our business transactions shall be governed exclusively by our General Sales Conditions.

Westdeutsche Dochtfabrik GmbH & Co. KG - Ravensstrasse 46 - 41334 Nettetal - Germany - Phone +49 2157 12060

info@wedobraids.com

www.wedobraids.com